

## SprayGuard

### Overview:

The SprayGuard is specifically designed to safely contain effluent hydroblast water and mitigate risks while tube side cleaning heat exchangers, shells and piping. The system will fully capture wastewater and divert it to be treated. Rain for Rent's standard Spillguard is combined with a 1524 x 1524 mm SprayGuard operator shelter and side walls to safely clean heat exchangers and can be set up in minutes.

### Features and Benefits:


- Easy set-up
- Minimizes waste
- Reduces post hydroblast cleanup
- Rear shell containment up to 1270 mm diameter
- Limit post-blasting scaffolding and unit clean up
- Reduces solids going to waste treatment
- Increase safety
- Developed for close proximity work by various hydroblast crafts

### Specification:

- Standard 1524 x 1524 mm operator shelter and berm
- HDPE standoff
- Capture bag with discharge
- Radial jet control

### Optional Accessories & Equipment:

- Modular spillguards to run under pipeline
- Puncture-resistant ground mats
- SolidGround® Traction Mats
- Create reusable blast water system when you combine the SprayGuard with Rain for Rent filtration and tanks
- Closed-loop filtration systems available

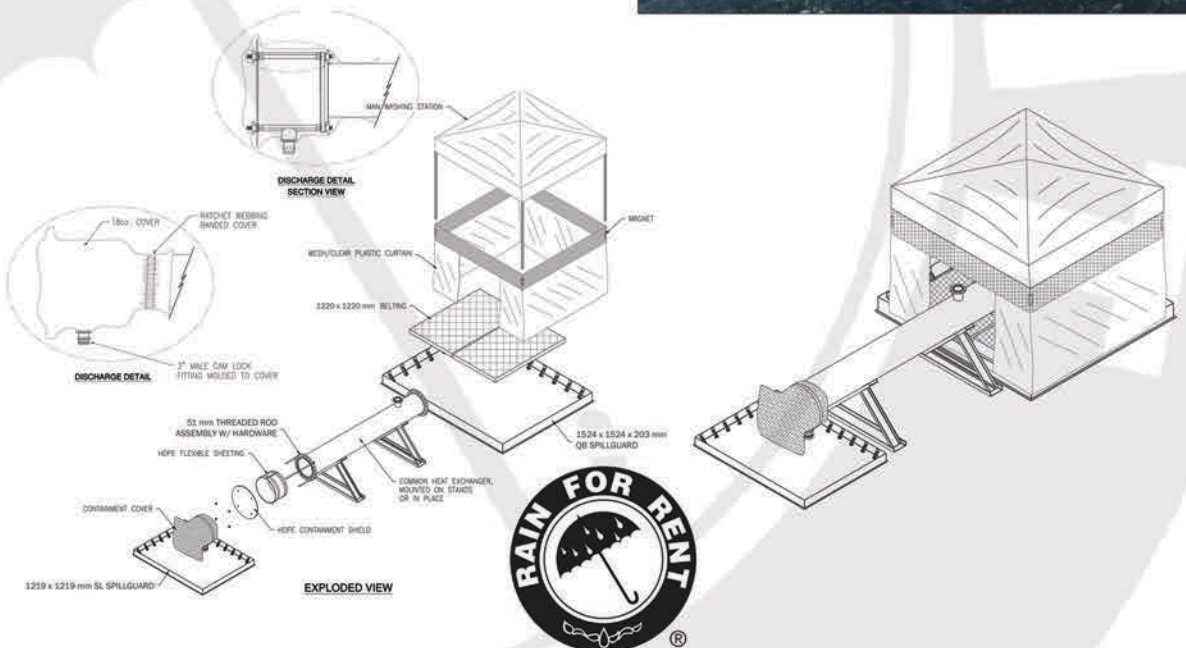

0845 900 2841  
rainforrent.co.uk